

→ 简介

/

()

→ 技术参数

防爆等级: [Ex ia Ga] IIC

供电电源:

(14+ 15-)


18V DC ~ 60V DC (24V DC)

输入信号类型 (1 2 3):

允许引线电阻: ≤ 20 Ω/

输出信号类型 (7 8 9 10 11 ¹)

C

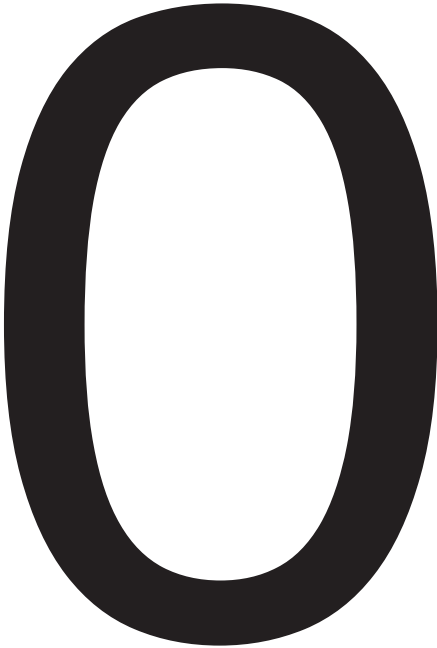

Nanjing New Power Electric Technology Co., Ltd.

		/
IEC 60584-1	K	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	E	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	J	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	T	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	N	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	S	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	R	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	B	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	W5Re-W26Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
ASTM E988-96	W3Re-W25Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
GOST R8.585	L	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
IEC 60751	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
GOST 6651	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.

